


1A

1B

SIGNAGE PANEL
TYPE 1
SCALE: NOT TO SCALE

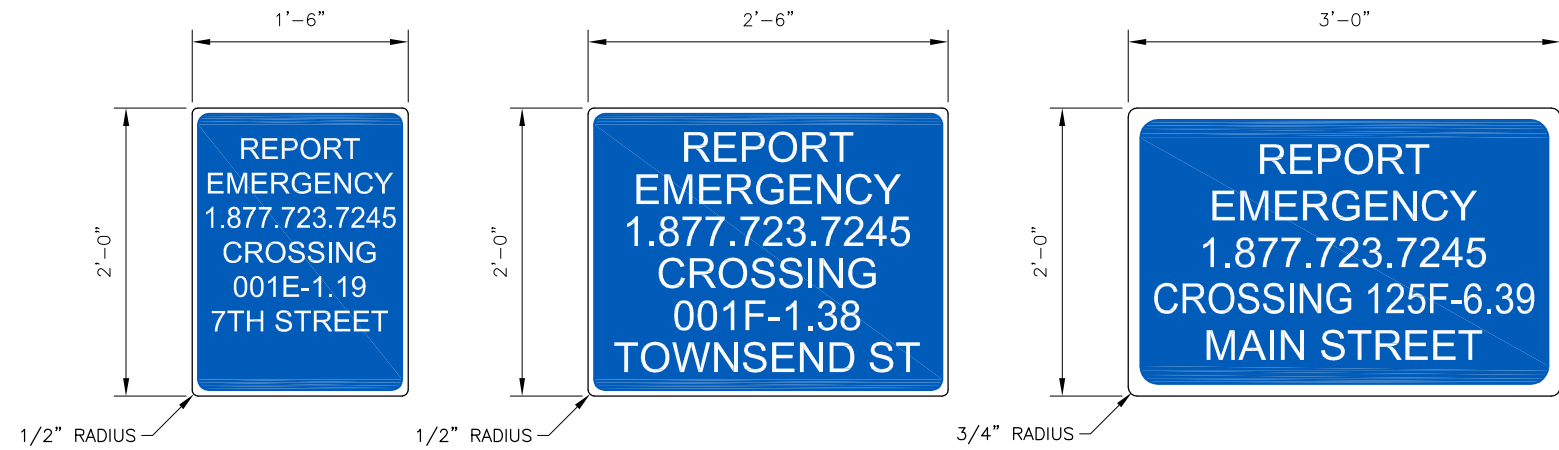

2A

2B

2C

STENCIL MARKING
TYPE 2
SCALE: NOT TO SCALE

TYPE	LOCATION ON SIGNAL HOUSE/CASE
1A	DOOR (2' WIDE)
1B	DOOR (2 1/2' AND WIDER)
2A	7TH STREET SIDE (SF)
2B	TOWNSEND STREET SIDE (SF)
2C	LONG SIDE

NOTES:

- EMERGENCY NOTIFICATION SIGN (SIGN 1-13a) SHALL COMPLY WITH THE REQUIREMENTS OF CALIFORNIA MUTCD CHAPTER 8B, SIGNS AND MARKINGS
- SIGN PANEL SHALL BE 1/8" THICK ALUMINUM
- BACKGROUND: BLUE, FEDERAL STANDARD FS 15080
- LETTERS AND NUMBERS: WHITE, 1.75" HIGH ARIAL FOR TYPES 1A & 2A, 2.5" HIGH ARIAL FOR OTHERS, RETROREFLECTIVE
- CALTRAIN WILL PROVIDE CPUC CROSSING NUMBER. FOR THE STREET NAME USE THAT OF THE STREET CROSSING THE TRACKS
- BORDERS: WHITE, 1" FOR TYPE 2C, 1/2" FOR OTHERS
- MOUNTING HARDWARE (TYPE 1): TAMPER PROOF STAINLESS STEEL SS316
- TYPE, PLACEMENT, AND LOCATION OF SIGN SHALL BE DETERMINED BY CALTRAIN

PENINSULA CORRIDOR JOINT POWERS BOARD										STANDARD DRAWINGS				CADD FILE NO.: SD-5117			
APPROVED BY:										 1250 San Carlos Avenue San Carlos, CA 94070				REV 0		DATE 093011	
 ENGINEERING MANAGER					 DEPUTY DIRECTOR OF ENGINEERING									SIGNAL & COMMUNICATION GENERAL SIGNAL GRADE CROSSINGS EMERGENCY NOTIFICATION SIGN			
REV	DATE	BY	CHK	APP	DESCRIPTION	REV	DATE	BY	CHK	APP	DESCRIPTION						