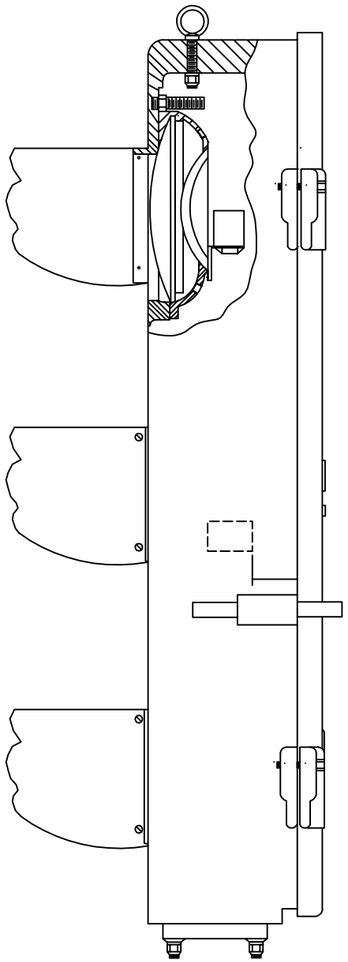

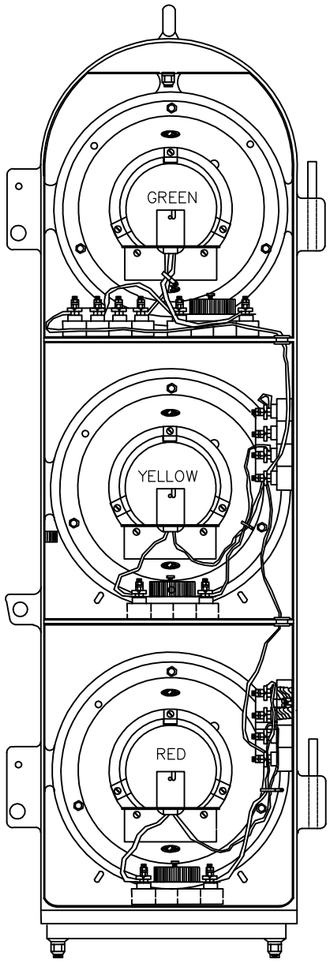

SIGNAL UNIT

NOTES:

1. ALL LAMP UNITS SHALL BE EQUIPPED WITH ADJUSTABLE RESISTOR.
2. ALL IN-LINE SIGNAL LIGHT UNITS SHALL BE LED, INCANDESCENT LIGHT IS NOT ACCEPTABLE.
3. ADJUST SIGNAL LENS HOTSPOT TO MANUFACTURER'S SPECIFICATIONS OR AS DIRECTED BY PCJPB.

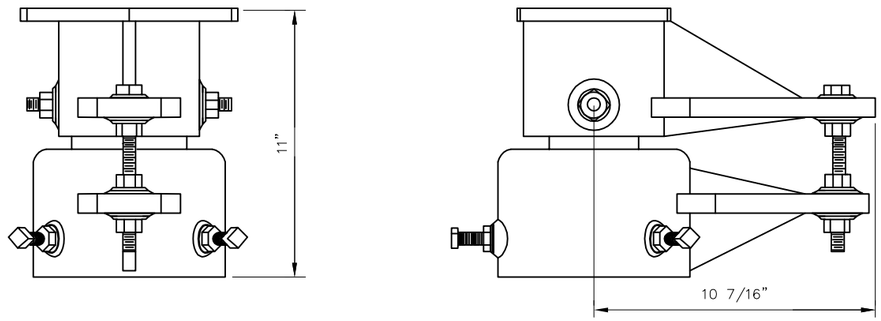

BRACKET ADJUSTABLE

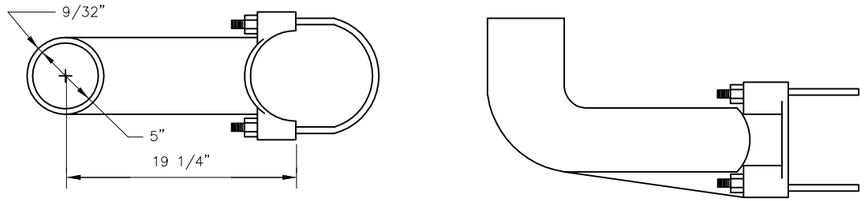

TUBE TYPE-SINGLE BRACKET

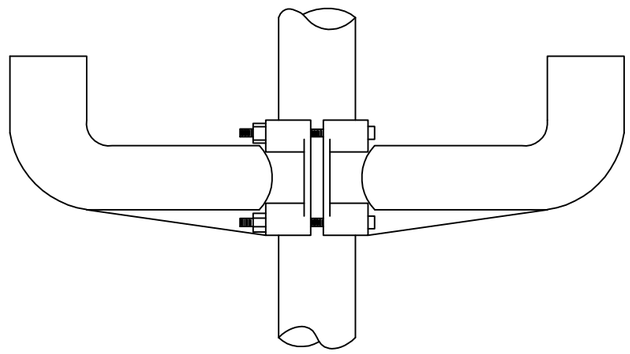

TUBE TYPE-DOUBLE BRACKET

REV	DATE	BY	CHK	APP	DESCRIPTION

REV	DATE	BY	CHK	APP	DESCRIPTION

PENINSULA CORRIDOR JOINT POWERS BOARD

APPROVED BY:

ENGINEERING MANAGER

DEPUTY DIRECTOR OF ENGINEERING

Caltrain

1250 San Carlos Avenue
San Carlos, CA 94070

STANDARD DRAWINGS

SIGNAL AND COMMUNICATION
SIGNAL APPARATUS
SIGNAL UNIT DETAILS
TYPICAL COLORLIGHT

CADD FILE NO.:	SD-5205
REV: 0	DATE: 093011
SIGNAL	
STANDARD NO.:	SD-5205